


BM10PH	XX			3	
--------	----	--	--	---	--

<b>Revision</b>	= XX					<b>Omit =</b>	No options
<b>Number of Station</b>	= 01-12					<b>RCI =</b>	Relief Cavity Industry Common 10-2
<b>Material</b>		= A				<b>RCS =</b>	Relief Cavity Sun T-3A (P in nose)
Aluminum 6061-T6, 3000 psi							
Carbon Steel <sup>1</sup> , 5000 psi		= S					
<b>Valve Spacing 3.25"</b>			= 3				<b>Ports</b>
					12 =		SAE Threaded Ports
					01 =		BSPP Threaded Ports

- 1) Blackening
- 2) Gauge port not included
- 3) Dim. "A" with relief cavity is 4.50"

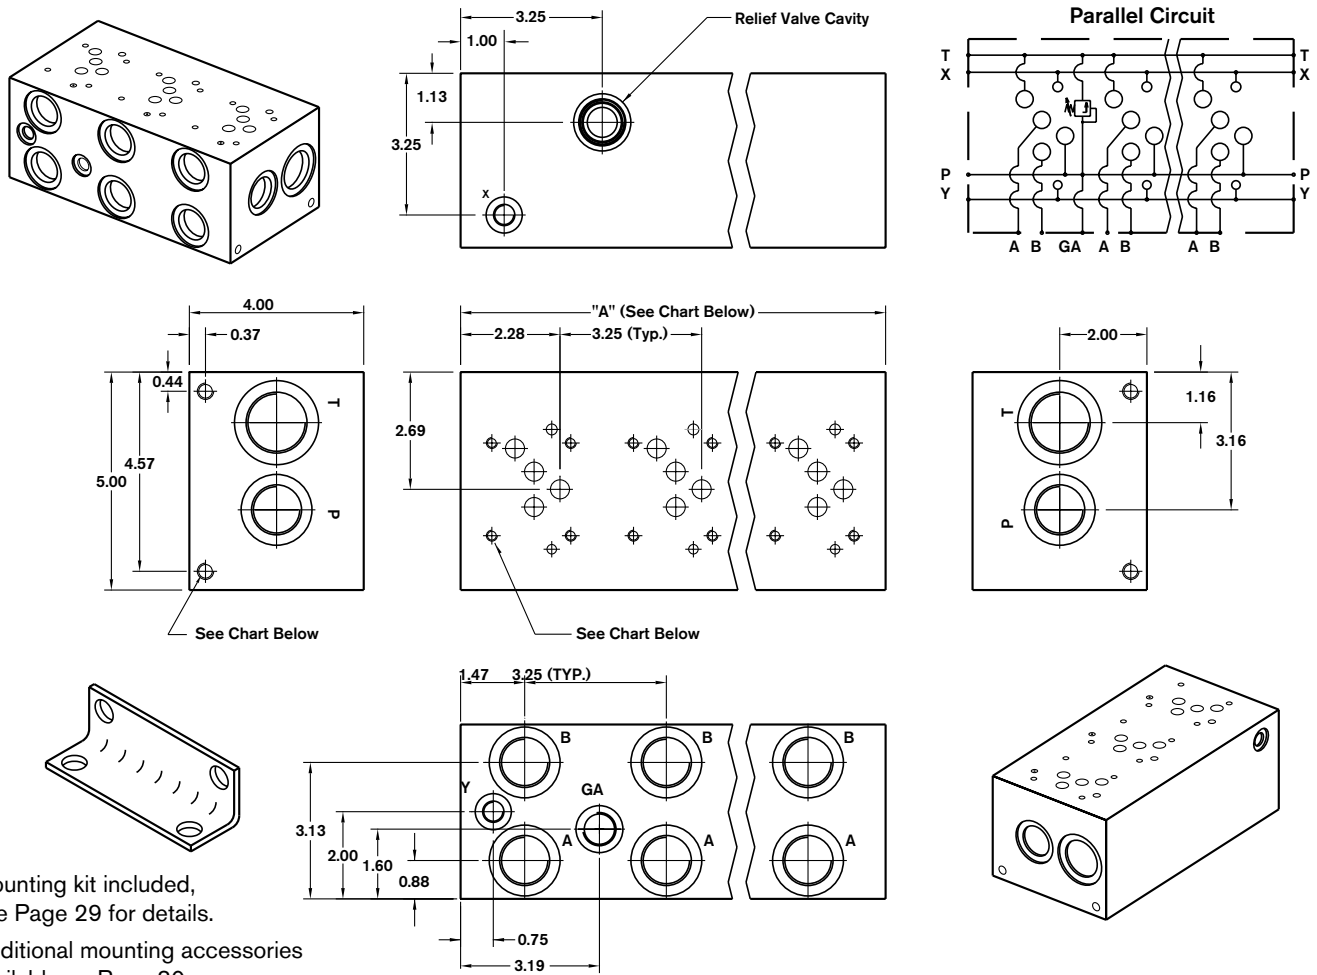

Mounting kit included, see Page 29 for details.  
Additional mounting accessories available on Page 30.

	T Port	P, A & B Ports	GA, X & Y Ports	Manifold (Mtg.)	Valve (Mtg.)
...12	1-5/16-12 SAE-16	1-1/16-12 SAE-12	9/16-18 SAE-6	3/8-16 x 0.55 DP.	1/4-20 x 0.60 DP.
...01	1" BSPP	3/4" BSPP	1/4" BSPP	M10 x 0.60 DP.	M6 x 0.60 DP.

Number of Stations	01 <sup>2</sup>	02	03	04	05	06	07	08 - 12
Dim. "A"	3.25 <sup>3</sup>	6.50	9.75	13.00	16.25	19.50	22.75	Consult Factory
Approx. Weight AL (lbs)	6	13	19	25	32	38	45	
Approx. Weight DI (lbs)	17	34	51	68	85	101	118	

All dimensions in inches